



BWT besttaste
best water technology

BWT
water + more

The best water for hot and cold drinks



- High filter capacities
- Reliable particle retention
- Immediate pure water that tastes good
- Quick and easy filter change

BWT besttaste filter cartridges

provide the best water for your vending machines, coffee machines and water dispensers. Installation-related particles or even a troubling unpleasant taste or odour (e.g. chlorine) are reliably eliminated.

This guarantees an optimal taste for all hot and cold drinks. BWT besttaste enables water, e.g. for water dispensers, to maintain a consistently high quality. But coffee machines and vending machines can also benefit from the improved water quality in areas with low carbonate hardness. And for areas with high carbonate hardness (scale content), BWT bestmax filter cartridges are the ideal addition from BWT water+more – fitting into the same connection technology (filter head).

BWT besttaste top technology

- Immediate best, particle-free water
- No time-consuming rinsing
- Horizontal and vertical installation possible

Connection technology


- Universal filter head from BWT water+more
- Automatic shut-off valve when changing filter
- Pivoting wall bracket

BWT besttaste

- Eliminates unwanted odour and taste in the water
- Reduces the level of heavy metals
- Eliminates particles from 5 µm
- Special silvering of the activated carbon checks the growth of bacteria


Ideal for vending machines

- Compact and space-saving
- Simple filter exchange
- High filter capacities up to 10,000 litres

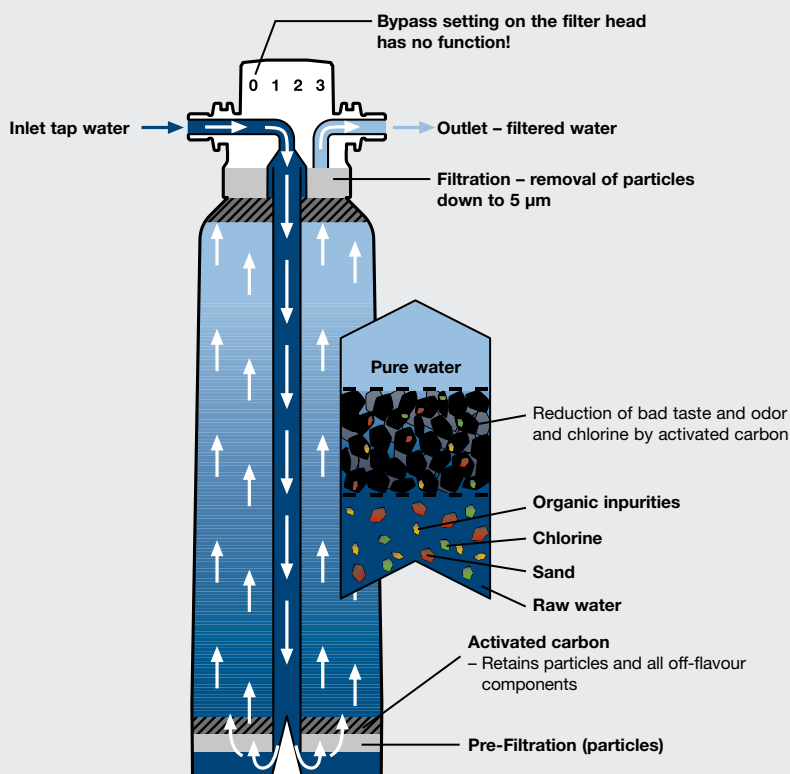

Cross-Section of a BWT besttaste filter cartridge

Technical Data*

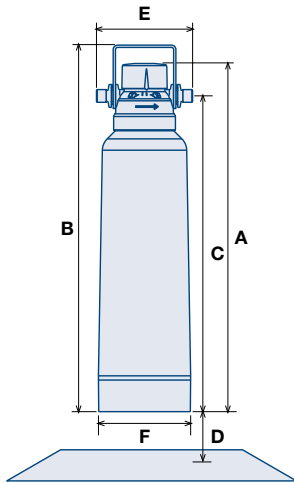

* Subject to change without notice
** max. 12 months

BWT besttaste X	
Connection thread (in/out)	3/8"
Nominal flow [l/h]	180
Pressure loss at the nominal flow rate [bar]	0.8
Typical capacity [litres]	10,000*
Particle filtration [µm]	5
Useful pressure range, min.-max. [kPa]/[bar]	200-800/2-8
Flow pressure [bar]	> 1.2
Water temperature, min.-max. [°C]	4-30
Ambient temperature during operation, min.-max. [°C]	4-40
Ambient temperature during storage/transportation [°C]	-20-50
Total height without bracket A [mm]	280
Total height with bracket B [mm]	300
Connection height C [mm]	230
Distance from floor D [mm]	65
Installed length E [mm]	125
Ø Filter cartridge F [mm]	88
Weight (dry/wet) (approximate) [kg]	0.50/1.10
Operating position	Horizontal or vertical
Order number for Installation Set	FS20A01A00
Order number for filter cartridge	FS20A00A00



BWT bestmax filter cartridges

In areas with a high local carbonate hardness (scale content above 7 °KH), our BWT bestmax product range is available with the same universal connection technology.

- Flexible – only one connecting filter head for all product sizes
- Capacity of 600-14,400 l
- Simple – quick filter change, simple disposable system
- Cost-efficient – ideal for all compact catering appliances

Delivery Scope (First Installation Set)

- Filter Cartridge
- Universal filter head with 3/8" external thread (incl. bypass setting and return valve)
- Wall mounting (without fixing material)
- Installation and Operating Instructions



Accessories

- Connecting hose 1500 mm (3/8" x 3/8" or 3/8" x 1/4")
Order No.: FS00Y01F00; FS00Y02F00
- BWT bestflush ventilation and flush valve, 3/8" x 3/8"
Order No.: FS00Y51A00
- Hot drinks test kit to determine the carbonate hardness and total hardness of drinking water
Order No.: YS00Y01A00

BWT UK Ltd
water+more
BWT House, The Gateway Centre
Coronation Road
High Wycombe
HP12 3SU
Phone: +44 (0)1494 838100
Fax: +44 (0)1494 838104

BWT water+more Deutschland GmbH
Spiegelgasse 13
D-65183 Wiesbaden
Tel.: +49.611.58019-0
Fax: +49.611.58019-22
info@water-and-more.de

BWT water + more GmbH
Professional Solutions Austria
Walter-Simmer-Str. 4
A-5310 Mondsee
Telefon +43 6232 5011-1164
Telefax +43 6232 27292-1164
kundenservice@bwt.at